


PLD_s 自動對心型

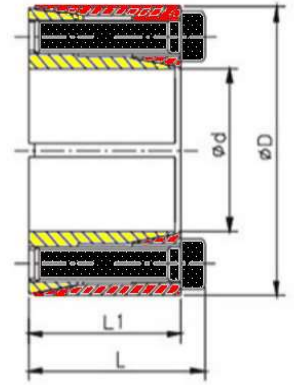

規格	d mm	D mm	L mm	L1 mm	M mm	T _s Nm	T Nm	F kN	P N/mm ²
6	6	16	13.5	11	M2.5-3H	1.2	9	3	69
6.35	6	16	13.5	11	M2.5-3H	1.2	10	3	72
7	7	17	13.5	11	M2.5-3H	1.2	11	3	64
8	8	18	13.5	11	M2.5-3H	1.2	12	3	62
9	9	20	15.5	13	M2.5-4H	1.2	17	4	60
9.35	9.35	20	15.5	13	M2.5-4H	1.2	18	4	59
10	10	20	15.5	13	M2.5-4H	1.2	19	4	60
11	11	22	15.5	13	M2.5-4H	1.2	21	4	54
12	12	22	15.5	13	M2.5-4H	1.2	24	4	55
14	14	26	20	17	M3-4H	2.1	40	6	50
15	15	28	20	17	M3-4H	2.1	44	6	50
16	16	32	21	17	M4-4H	4.9	86	10	79
17	17	35	25	21	M4-4H	4.9	88	10	56
18	18	35	25	21	M4-4H	4.9	94	11	57
19	19	35	25	21	M4-4H	4.9	99	11	56
20	20	38	26	21	M5-4H	10	179	17	89
22	22	40	26	21	M5-4H	10	187	18	80
24	24	47	32	26	M6-4H	17	290	24	79
25	25	47	32	26	M6-4H	17	300	24	78
25.4	25.4	47	32	26	M6-4H	17	310	24	79
28	28	50	32	26	M6-6H	17	480	34	105
30	30	55	32	26	M6-6H	17	510	34	95
32	32	55	32	26	M6-6H	17	600	38	105
35	35	60	37	31	M6-8H	17	820	47	100
38	38	65	37	31	M6-8H	17	880	47	92
40	40	65	37	31	M6-8H	17	1000	50	99
42	42	75	44	36	M8-6H	41	1410	67	99
45	45	75	44	36	M8-6H	41	1510	67	99
48	48	80	44	36	M8-6H	41	2150	86	123
50	50	80	44	36	M8-8H	41	2150	89	118

M: 公制螺絲

T(Nm): 在 T_s 旋緊之傳達扭矩

T_s: 螺絲旋緊扭矩

F(KN): 在 T_s 旋緊之軸向推力

M8-8H M8 螺絲 8 孔

P(N/mm²): 作 T_s 旋緊用在輪轂面壓力