


FK 型聯軸器

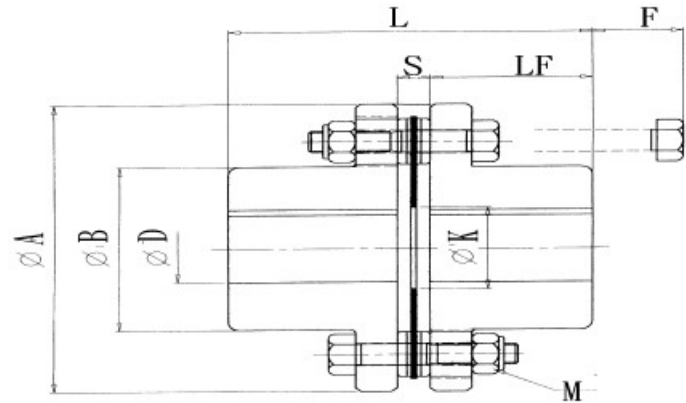

尺寸性能表：

單位：mm

型號	A	D 最大孔徑	B	L (+/-1)	LF (+/-1)	S (+/-1)	F Min	M DIN912	J	TQ N.M	Kg·m
FK67	67	23	34	58	25	7	10	M6	5	39.2	4
FK81	81	32	46	59	25	7.5	10	M6	5	98	10
FK93	93	35	51	69	29	11	16	M8	6	176	18
FK104	104	42	61	79	34	12	16	M8	6	245	25
FK126	126	50	71	95	41	13	20	M8	7	448	45
FK144	144	60	88	109	48	13	22	M8	7	796	80
FK158	158	65	96	138	60	20	24	M8	7	1194	120
FK168	168	76	106	124	55	14	24	M14	9	1194	120
FK194	194	90	130	142	64	14	24	M14	9	1990	200
FK214	214	95	137	175	76	23	22	M14	10	3280	330
FK246	246	109	157	202	89	24	23	M18	10	4770	480
FK276	276	118	170	230	101	28	34	M18	10	6360	640

FK 型聯軸器

1. 繞性鋼板式聯軸器、經濟實惠、拆裝容易、鍵槽固定
2. 適用工作溫度 $-30^{\circ}\text{C} \sim 90^{\circ}\text{C}$
3. FK 型聯軸器外徑尺寸範圍 67mm ~ 276mm

特殊規格，可接受訂製
內孔 公差標準 H7
訂購 請如圖示標示鍵槽尺寸

